


BZ-111-TP

Strapping Machine with TOP PUSHER
(Offline)

MODEL SERIES:

EDGE

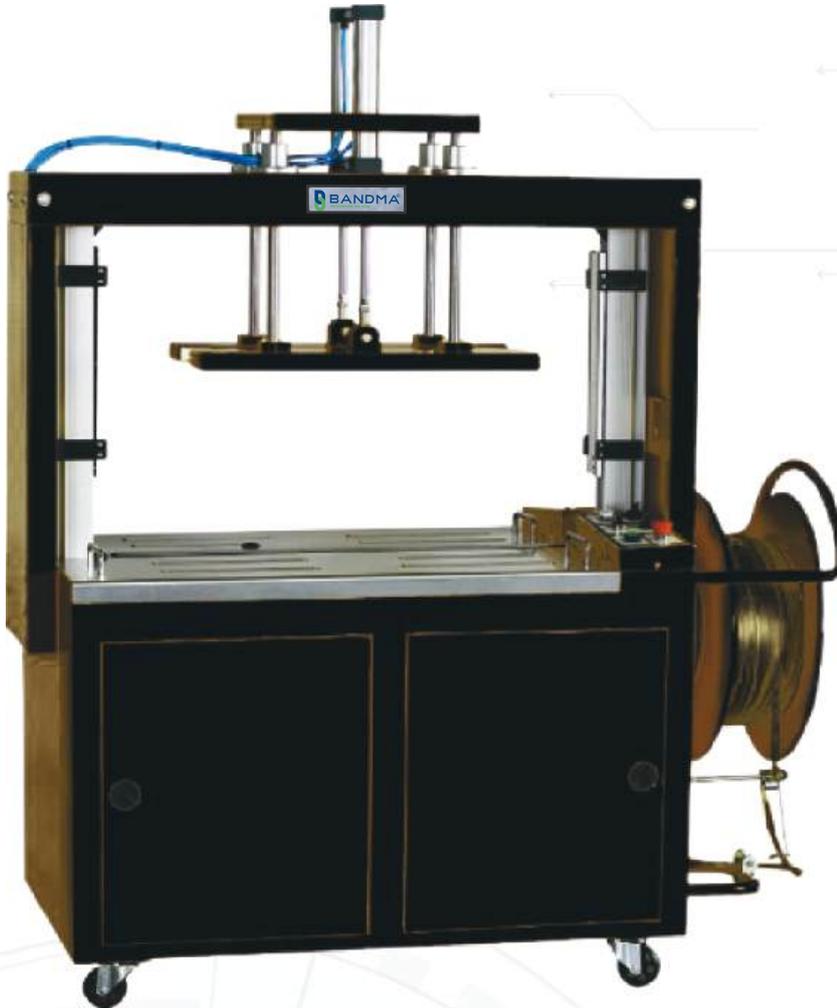


DESCRIPTION

BANDMA EDGE (BZ-111-TP) is high working table automatic strapping machine. Whole machine is controlled by PLC. Under packing process, the operator gently pushes the goods to finish strapping. The machine has wide applications in the industry of corrugated board, tobacco industry, textile industry and so on.

MACHINE FEATURES

1. The unique tighten structure design to make the tighten force is more stronger
2. Opening top cover panel design to easy maintenance
3. New type heating section to heating fast and longer life
4. Working table with eight unpowered rollers
5. Top cylinder pressure



BANDMA EQUIPCORP LIMITED

contact@bandmainfo.com | www.bandmainfo.com

Corporate Office: Ferdeplex, A-16, Swarn Park Extension, Mundka Colony, New Delhi-110041

Specification

MODEL	BZ-111-TP (BANDMA EDGE)
Power source	3 P, 415 V, 50/60 HZ, 1.24 KW, 10 A
Packing speed	≤ 7 second/path
Air source	4-8 kg/cm ² (It's possible to customize)
Strapping force	0-60 kg (adjustable)
Supporting value	80 kgs
Hot-adhering position	Bottom
Table height	750 mm (It's possible to customize the height)
Arch	<ol style="list-style-type: none"> Standard size: width 1000 mm × height 1000 mm (inner size) Material: Aluminum alloy with iron cover (It's possible to customize the size)
Applicable PP strap	Width (9, 10, 11, 12, 13, 15) mm Thickness (0.6-1.0) mm (to be specified)
Applicable PP strap spool	W : 160 mm Inner dia. : 200 mm~210 mm Out dia. : 400 mm~500 mm
Packing type	Parallel strapping, Manual operation, continual packing, ball switch and foot switch
Machine dimensions	L1450 × W620 × H2123 mm
Weight	N.W. : 200 kg G.W. : 290 kg
Noise	≤75DB
Environment condition	Humidity ≤ 98%, Temperature 0-40°
Bottom adhesion	Surface ≥ 90%, Width ≥ 20%, Deviation of position ≤ 2 mm